

# DS-2CE55C2P(N)-IRP


## 720 TVL PICADIS Indoor IR Dome Camera



### Key features

- 1/3" PICADIS
- 1.3MP Sensor: 1280 (H) x 960 (V) Effective Pixels
- 720 TVL Horizontal Resolution
- True Day/Night
- 2.8/3.6/6mm Fixed Lens, 0.1 lux /F1.2
- 20m IR Distance
- Smart IR, high dynamic range
- Superior video image output and ultra low light illumination
- Wide operating temperature range

### Dimensions

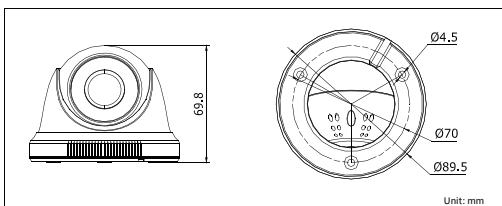

### Accessories



DS-1229ZJ-1  
(Wall Mount)



DS-1239ZJ-1  
(Wall Mount)

| DS-2CE55C2P(N)-IRP           |   |
|------------------------------|---|
| Camera                       |   |
| Image Sensor                 | 1/3" PICADIS  |
| Signal System                | PAL/NTSC  |
| Effective Pixels             | 1280 (H) x 960 (V)  |
| Min. Illumination            | 0.1 Lux @ (F1.2,AGC ON),0 Lux with IR                                     |
| Shutter speed                | PAL: 1/25 s to 1/25,000 s<br>NTSC: 1/30 s to 1/30,000 s                   |
| Lens                         | 3.6mm (2.8mm, 6mm optional)   |
|                              | Angle of view: 71.4° (3.6 mm)   |
| Lens Mount                   | M12   |
| Angle Adjustment             | Pan: 0 - 360°;Tilt: 0 - 75°; Rotation: 0 - 360°                           |
| Day & Night                  | IR cut filter with auto switch  |
| Horizontal Resolution        | 720 TVL   |
| Synchronization              | Internal synchronization  |
| Video Output                 | 1Vp-p composite output (75 Ω/BNC)   |
| S/N Ratio                    | More than 62 dB   |
| General                      |   |
| Working Temperature/Humidity | -40 °C - 60 °C (-40 °F - 140 °F)<br>Humidity 90% or less (non-condensing) |
| Power Supply                 | 12 V DC   |
| Power Consumption            | Max. 1.5 W<br>(Max. 4.5 W with IR cut filter on)                          |
| IR Range                     | 20 meters   |
| Dimensions                   | Φ89.5 x 69.8 mm(Φ3.52" x2.75")  |
| Weight                       | 200 g (0.44 lbs)  |

### Available models

PAL: DS-2CE55C2P-IRP  
NTSC : DS-2CE55C2N-IRP