

# Syncro View



## Product Overview

- Designed and manufactured to the highest standards in a quality controlled environment the Syncro VIEW fire alarm annunciator provides a simple and convenient method of extending the controls and indications of the Syncro fire alarm control panel to other locations.
- The large, graphic liquid crystal display and high brightness LED indicators duplicate the indications on the Syncro fire alarm control panel at up to 15 additional locations via a simple, two-wire serial data connection.
- The Syncro VIEW is available in either a 24V DC powered option (which can be powered via an additional 2 cores from the Syncro control panel/ local 24V DC supply) or a 230V powered option with local battery back up.
- Syncro VIEW is housed in a small enclosure which is styled similarly to the Syncro control panel and is ideal for installations where a large control panel would be detrimental to décor such as entrance halls.
- Up to 15 Syncro VIEW annunciators can be connected to each control panel on the Syncro network making VIEW ideal where multiple points of indication and/or control are required such as nurses stations or shop units.

## Local LCD Control Panel Repeaters

### Features

- Up to 15 annunciators can be connected to each Syncro, Syncro Response or Syncro AS fire control panel.
- Large liquid crystal display (240 x 64 pixels)
- High brightness LED indications
- Internal sounder
- Replicates all Syncro panel controls
- Simple, two-wire serial connection
- Small, Syncro style enclosure
- Removable electronics for easy installation
- 24V DC or 230V AC power options
- Low power consumption
- Multi language options
- Connection monitored by Syncro fire control panel


## Equipment

Product Code	Description	PSU	Size (mm)
K67000M1	Syncro View repeater panel	-	330 x 255 x 90
K67750M1	Syncro View repeater panel	750mA	330 x 255 x 90
K67001M1	Syncro View repeater panel c/w enable keyswitch	-	330 x 255 x 90
K67751M1	Syncro View repeater panel c/w enable keyswitch	750mA	330 x 255 x 90


## Technical

<b>Construction</b>	- 1.2mm mild sheet steel
<b>IP Rating</b>	- IP30
<b>Finish</b>	- Epoxy powder coated
<b>Colour - lid &amp; box</b>	- BS 00 A 05 grey - fine texture
<b>Colour - controls plate &amp; labels</b>	- Ral 7047 light grey - satin
<b>Weight</b>	- 4kg (standard panel)
<b>Display</b>	- 8 lines of 40 characters graphic LCD
<b>Cable entry</b>	- 5 x 20mm knockouts in top of box and 5 in rear
<b>Mains supply (Mains models only)</b>	- 230V AC +10% - 15% (20 Watts maximum)
<b>24V supply (24V DC models only)</b>	- 21 to 30V DC
<b>Mains supply fuse</b>	- 2 Amp, 20mm
<b>Power supply rating</b>	- 28V 750mA total (including battery charging)
<b>Maximum ripple current</b>	- 200 millivolts
<b>Battery type (Yuasa NP)</b>	- Two 12 Volt 1.9Ah sealed lead acid in series
<b>Battery charge voltage</b>	- 27.6VDC nominal
<b>Battery charge current</b>	- 200mA maximum
<b>Battery fuse</b>	- 200mA, 20mm, glass
<b>Maximum current draw from batteries</b>	- 95mA
<b>Quiescent current of panel in mains fail</b>	- 0.03 Amps
<b>Serial data connection</b>	- 2 core RS485 (Up to 1200 metres total cable length)
<b>Maximum terminal capacity</b>	- 2.5mm <sup>2</sup>

Syncro Control Panel

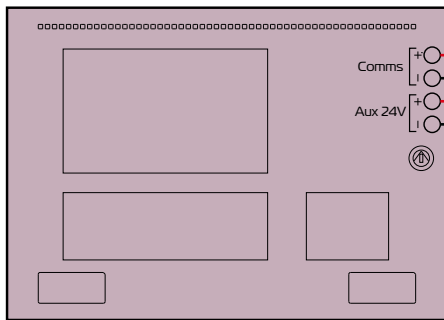

Syncro View #1



Syncro View #15

